LED Wraparound Fixtures

CLEANLIFE® LED

CLEANLIFE® LED Wraparound Fixtures are an excellent general purpose lighting fixture for stairwells, ceilings, and utility areas. With integrated LED technology, this fixture is far superior than its predecessor; eliminating maintenance, saving energy and qualifying for rebates both commercial and residential markets.

Linkable   **Anti-Glare**   **Robust Design**   **Energy Saving**

## Connect Together

Daisy-Chain

FEATURES

- 120V AC Input, Non-Dimmable
- Long Lifetime, L70>50,000 Hours
- Steel Base, Powder Coated
- Daisy-Chain or Connect Together
- Jumper/Linking Cable Included
- Mounting Hardware Kit Included
- IP-20 Rated, For Indoor Use Only
- Energy Star Certified* and DLC Qualified*
- ETL Listed and RoHS Compliant
- 5-Year Limited Warranty

Select models only. Please see ordering information table for details.

APPLICATION INFORMATION

Applications
- Stairwells
- Ceilings
- Hallways
- Utility Room
- General Lighting

Market Segments
- Commercial
- Residential

SPECIFICATIONS

Dimensions	See Table
Operating Temp.	-25°C~+55°C
Application	Indoor
Warranty	5-year Manufacturer's Limited

Color Temperature

3000K	4000K	5000K

INTEGRATED LED

DAMP LOCATION

SURFACE MOUNT

WALL MOUNT

ETL c us LISTED Intertek

RoHS COMPLIANT

ENERGY STAR

5-Year Limited Warranty

CLEANLIFE® LED

| Project/Job	Notes
Date	
Comments	
Prepared by	

Ordering Information

Part Number	Length (IN)	Color Temperature	Average Rated Life (hrs.)	Input Voltage (V)	Rated Power (W) (±10%)	Typical Lumens (lm) (+10%)	Nominal Lumens Per Watt	CRI (±5)	DLC	Energy Star
CL-WR-246-25W-830N	24	3000K	L70>50,000	120V DC	25	2500	100	80	Yes	No
CL-WR-246-25W-840N	24	4000K	L70>50,000	120V DC	25	2500	100	80	Yes	No
CL-WR-246-25W-850N	24	5000K	L70>50,000	120V DC	25	2500	100	80	Yes	No
CL-WR-446-48W-830N110	48	3000K	L70>50,000	120V DC	48	4000	83	80	No	Yes
CL-WR-446-48W-840N110	48	4000K	L70>50,000	120V DC	48	4000	83	80	No	Yes
CL-WR-446-48W-850N110	48	5000K	L70>50,000	120V DC	48	4000	83	80	No	Yes
CL-WR-446-48W-8430N	48	3000K	L70>50,000	120V DC	48	5280	110	80	Yes	No
CL-WR-446-48W-840N	48	4000K	L70>50,000	120V DC	48	5280	110	80	Yes	No
CL-WR-446-48W-850N	48	5000K	L70>50,000	120V DC	48	5280	110	80	Yes	No

Dimensions

Part Number	Dimensions (LxWxH) (IN)
CL-WR-246-25W-830N	21.3 x 5.5 x 1.6
CL-WR-246-25W-840N	21.3 x 5.5 x 1.6
CL-WR-246-25W-850N	21.3 x 5.5 x 1.6
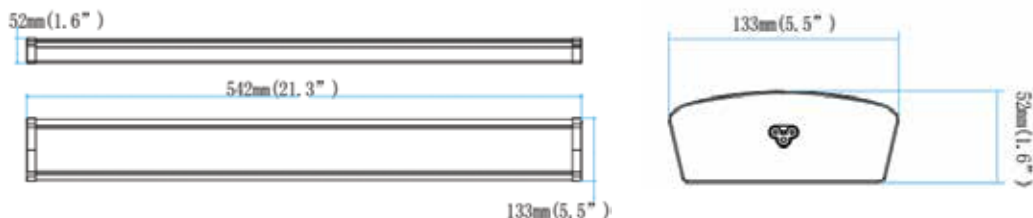
Part Number	Dimensions (LxWxH) (IN)
CL-WR-446-48W-830N110	48 x 5.5 x 1.6
CL-WR-446-48W-840N110	48 x 5.5 x 1.6
CL-WR-446-48W-850N110	48 x 5.5 x 1.6
CL-WR-446-48W-830N	48 x 5.5 x 1.6
CL-WR-446-48W-840N	48 x 5.5 x 1.6
CL-WR-446-48W-850N	48 x 5.5 x 1.6
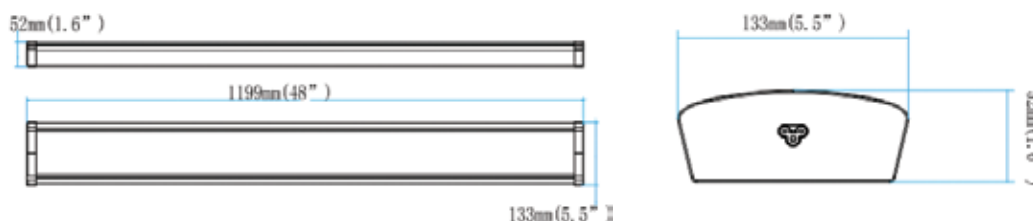
Included Accessories

4 x   4 x   2 x   4 x
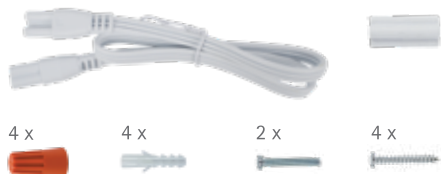
CLEANLIFE® LED
1-800-316-2532
support@cleanlifeled.com
www.cleanlifeled.com

CLEANLIFE® LED